



HYDRA-FLEX
HOSE AND FITTINGS
SOLUTIONS CENTER

MULTIFIT TYPE


SAE STANDARD CONNECTIONS

M2000®

SAE STANDARD CONNECTIONS

M12810

**NPTF MALE 60° CONE SEAT
SAE J516/J514**

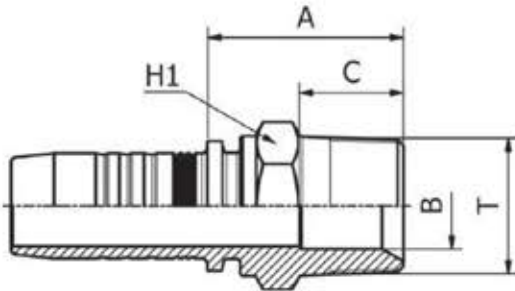

PART. REF.	HOSE BORE			Thread		DIMENSIONS mm					
	DN	Dash	inch			B	A	C	H1		
M12810-03-02	5	-3	3/16"	1/8" - 27		3.0	23.5	10.0	12.0		
M12810-03-04	5	-3	3/16"	1/4" - 18		5.5	29.0	14.5	14.0		
M12810-04-02	6	-4	1/4"	1/8" - 27		4.0	24.0	10.0	12.0		
M12810-04-04	6	-4	1/4"	1/4" - 18		5.5	29.0	14.5	14.0		
M12810-04-06	6	-4	1/4"	3/8" - 18		9.3	27.5	14.5	19.0		
M12810-04-08	6	-4	1/4"	1/2" - 14		9.3	33.5	19.2	24.0		
M12810-05-04	8	-5	5/16"	1/4" - 18		5.5	29.5	14.5	14.0		
M12810-05-06	8	-5	5/16"	3/8" - 18		9.3	32.0	14.5	19.0		
M12810-06-04	10	-6	3/8"	1/4" - 18		5.5	30.0	14.5	14.0		
M12810-06-06	10	-6	3/8"	3/8" - 18		9.3	28.5	14.5	19.0		
M12810-06-08	10	-6	3/8"	1/2" - 14		12.5	34.5	19.2	24.0		
M12810-08-06	12	-8	1/2"	3/8" - 18		9.3	29.0	14.5	19.0		
M12810-08-08	12	-8	1/2"	1/2" - 14		12.5	35.0	19.2	24.0		
M12810-08-12	12	-8	1/2"	3/4" - 14		15.5	35.5	19.2	27.0		
M12810-10-08	16	-10	5/8"	1/2" - 14		12.5	38.5	19.2	24.0		
M12810-10-12	16	-10	5/8"	3/4" - 14		16.0	40.0	19.2	27.0		
M12810-12-08	19	-12	3/4"	1/2" - 14		12.5	36.5	19.2	27.0		
M12810-12-12	19	-12	3/4"	3/4" - 14		16.0	36.5	19.2	27.0		
M12810-12-16	19	-12	3/4"	1" - 11.5		19.8	46.0	24.2	36.0		
M12810-16-12	25	-16	1"	3/4" - 14		15.5	39.0	19.2	32.0		
M12810-16-16	25	-16	1"	1" - 11.5		19.8	44.0	24.2	36.0		
M12810-16-20	25	-16	1"	1.1/4" - 11.5		26.0	56.5	25.0	46.0		
M12810-20-20	31	-20	1.1/4"	1.1/4" - 11.5		26.0	56.5	25.0	46.0		
M12810-24-24	38	-24	1.1/2"	1.1/2" - 11.5		32.0	57.5	26.0	50.0		
M12810-32-32	51	-32	2"	2" - 11.5		45.0	64.5	26.5	65.0		
M12810-40-40	63	-40	2.1/2"	2.1/2" - 8		55.4	78.0	39.9	80.0		
M12810-48-48	76	-48	3"	3" - 8		68.9	86.0	41.5	100.0		