




HYDRA-FLEX
HOSE AND FITTINGS
SOLUTIONS CENTER

MF2000®

INTERLOCK PLUS TYPE


XTRAFLEX

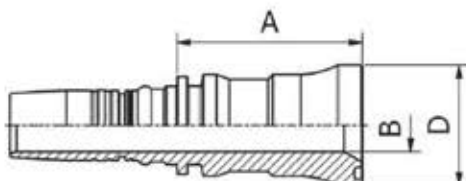

M48510

XTRAFLEX/62
(SAE J518 CODE 62 - ISO 6162-2
PORT COMPATIBLE)

PART. REF.	HOSE BORE			Flange		DIMENSIONS mm							
	DN	Dash	inch	inch		B	A	D					
M48510-12-12	19	- 12	3/4"	3/4"		14.5	64.0	41.4					
M48510-16-16	25	- 16	1"	1"		19.5	68.5	47.7					
M48510-20-20	31	- 20	1 1/4"	1 1/4"		25.0	88.0	54.4					
M48510-24-24	38	- 24	1 1/2"	1 1/2"		31.0	102.0	63.7					
M48510-32-32	51	- 32	2"	2"		41.0	128.5	79.6					
M48510-40-40	63	- 40	2 1/2"	2 1/2"		51.5	148.5	99.2					

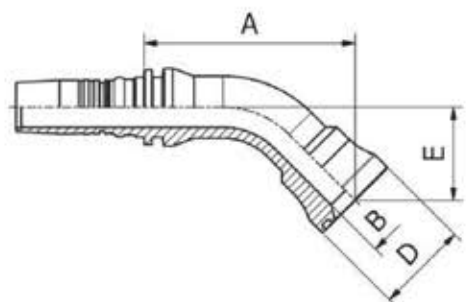


XTRAFLEX

M48540

45° XTRAFLEX/62
(SAE J518 CODE 62 - ISO 6162-2
PORT COMPATIBLE)

PART. REF.	HOSE BORE			Flange		DIMENSIONS mm							
	DN	Dash	inch	inch		B	A	D	E				
M48540-12-12	19	- 12	3/4"	3/4"		14.5	92.5	41.4	38.0				
M48540-16-16	25	- 16	1"	1"		19.5	101.5	47.7	45.0				
M48540-20-20	31	- 20	1 1/4"	1 1/4"		25.0	138.0	54.4	62.5				
M48540-24-24	38	- 24	1 1/2"	1 1/2"		31.0	155.0	63.7	71.5				
M48540-32-32	51	- 32	2"	2"		39.0	193.5	79.6	92.5				



XTRAFLEX

M48590

90° XTRAFLEX/62
(SAE J518 CODE 62 - ISO 6162-2
PORT COMPATIBLE)

PART. REF.	HOSE BORE			Flange		DIMENSIONS mm							
	DN	Dash	inch	inch		B	A	D	E				
M48590-12-12	19	- 12	3/4"	3/4"		14.5	75.5	41.4	75.0				
M48590-16-16	25	- 16	1"	1"		19.5	83.5	47.7	90.0				
M48590-20-20	31	- 20	1 1/4"	1 1/4"		25.0	107.0	54.4	120.0				
M48590-24-24	38	- 24	1 1/2"	1 1/2"		31.0	122.0	63.7	140.0				
M48590-32-32	51	- 32	2"	2"		39.0	147.5	79.6	178.0				