


MF₂₀₀₀

XTRALOCK TYPE

DIAMONDSPIR HOSE RANGE

M52810/M57810


NPTF MALE 60° CONE SEAT - SAE J516/J514
 MACHO NPTF ASIENTO A 60° - SAE J516/J514
 AG NPTF KONUS 60° - SAE J516/J514
 MASCHIO NPTF CONO 60° - SAE J516/J514



PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm			
	DN	inch	Size	T	B	A	C	H ₁
M52810-12-12	19	3/4"	12	3/4" - 14	15,0	49,4	21,0	32
M57810-16-16	25	1"	- 16	1" - 11.5	19,0	60,4	24,2	41
M57810-20-20	31	1.1/4"	- 20	1.1/4" - 11.5	26,1	63,9	28,0	46
M57810-24-24	38	1.1/2"	- 24	1.1/2" - 11.5	32,1	70,4	30,0	55
M57810-32-32	51	2"	- 32	2" - 11.5	42,0	75,5	35,0	70
M57810-40-40	63	2.1/2"	- 40	2.1/2" - 8	55,4	94,5	43,0	80
M57810-48-48	76	3"	- 48	3" - 8	62,5	123,5	51,5	100

M68610

ISO/SAE CODE 62 FLANGE - SAE J516 / ISO 12151-3
 BRIDA ISO/SAE CODIGO 62 - SAE J516 / ISO 12151-3
 ISO/SAE CODE 62 FLANSCH - SAE J516 / ISO 12151-3
 FLANGIA DRITTA SAE CODE 62 - SAE J516 / ISO 12151-3

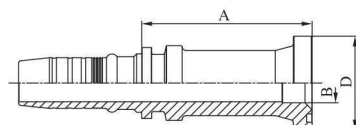

PART. REF.	HOSE BORE			FLANGE	DIMENSIONS mm			
	DN	inch	Size		B	A	D	
M68610-12-12	19	3/4"	-12	3/4"	16,0	74,0	41,4	
M68610-16-16	25	1"	- 16	1"	20,0	86,0	47,7	
M68610-20-20	31	1.1/4"	- 20	1.1/4"	26,0	91,0	54,2	
M68610-24-24	38	1.1/2"	- 24	1.1/2"	32,0	97,5	63,7	
M68610-32-32	51	2"	- 32	2"	42,0	112,5	79,6	
M68610-32-40 *	51	2"	- 32	2.1/2"	51,5	124,0	107,8	
M68610-40-32	63	2.1/2"	- 40	2"	41,0	115,0	79,6	
M68610-40-40 *	63	2.1/2"	- 40	2.1/2"	51,5	127,0	107,8	
M68610-48-48 *	76	3"	- 48	3"	63,0	167,0	131,9	

* Manuli specification / Manuli spezifikation / Especificación Manuli / Specifica Manuli