



HYDRA-FLEX
HOSE AND FITTINGS
SOLUTIONS CENTER


OPF TYPE

manuli®
HYDRAULICS

DIN STANDARD CONNECTIONS

OPF11210

METRIC
MALE 24° CONE SEAT HEAVY DUTY
DIN 20066 / ISO 12151-2

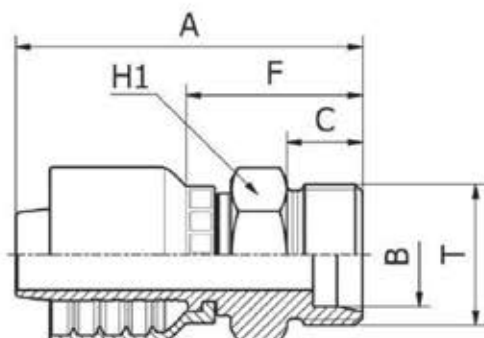

PART. REF.	HOSE BORE			Thread	Pipe	DIMENSIONS mm					
	DN	Dash	inch	T	mm	B	A	C	F	H1	
OPF11210-04A16	6	- 4	1/4"	M 16X1,5	8,0	5,5	53,0	12,0	25,5	17,0	
OPF11210-04A18	6	- 4	1/4"	M 18X1,5	10,0	6,0	54,0	12,0	26,5	19,0	
OPF11210-04A20	6	- 4	1/4"	M 20X1,5	12,0	7,0	56,5	12,0	29,0	22,0	
OPF11210-05A20	8	- 5	5/16"	M 20X1,5	12,0	7,0	57,0	12,0	29,0	22,0	
OPF11210-06A18	10	- 6	3/8"	M 18X1,5	10,0	7,0	56,5	12,0	27,0	19,0	
OPF11210-06A20	10	- 6	3/8"	M 20X1,5	12,0	7,0	58,5	12,0	29,0	22,0	
OPF11210-06A22	10	- 6	3/8"	M 22X1,5	14,0	8,0	60,5	14,0	31,0	22,0	
OPF11210-08A24	12	- 8	1/2"	M 24X1,5	16,0	9,3	62,5	14,0	31,5	24,0	
OPF11210-10A30	16	- 10	5/8"	M 30X2	20,0	15,0	70,0	16,0	35,5	30,0	
OPF11210-12A30	19	- 12	3/4"	M 30X2	20,0	15,0	73,5	16,0	37,0	30,0	
OPF11210-12A36	19	- 12	3/4"	M 36X2	25,0	19,8	77,5	18,0	41,0	36,0	
OPF11210-16A36	25	- 16	1"	M 36X2	25,0	19,8	90,5	18,0	42,5	36,0	
OPF11210-16A42	25	- 16	1"	M 42X2	30,0	25,0	92,5	20,0	44,5	46,0	