



HYDRA-FLEX
HOSE AND FITTINGS
SOLUTIONS CENTER


OPF TYPE



BS STANDARD CONNECTIONS

OPF20542/OPF20543

**45° BSP
FEMALE ELBOW 60° CONE
BS5200 / ISO 12151-6**

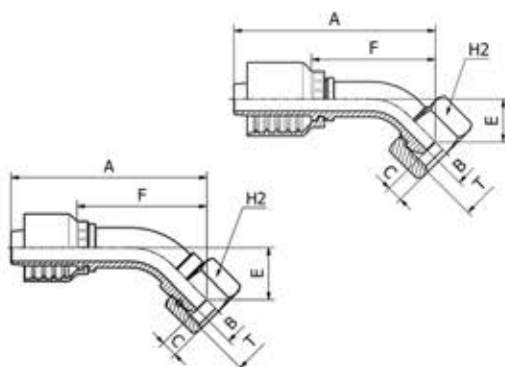

PART. REF.	HOSE BORE			Thread		DIMENSIONS mm						
	DN	Dash	inch			B	A	C	E	F	H2	
OPF20543-04A04	6	- 4	1/4"	1/4" - 19		4.0	63.5	5.4	15.0	36.0	19.0	
OPF20543-04A06	6	- 4	1/4"	3/8" - 19		7.0	65.0	6.0	16.0	37.5	22.0	
OPF20543-05A06	8	- 5	5/16"	3/8" - 19		7.0	66.0	6.0	13.5	38.0	22.0	
OPF20543-06A06	10	- 6	3/8"	3/8" - 19		7.0	71.5	6.0	15.5	42.0	22.0	
OPF20543-06A08	10	- 6	3/8"	1/2" - 14		9.3	72.0	6.3	16.0	42.5	27.0	
OPF20543-08A08	12	- 8	1/2"	1/2" - 14		9.3	81.0	6.3	17.0	49.5	27.0	
OPF20542-08A10	12	- 8	1/2"	5/8" - 14		12.1	85.5	10.2	22.5	54.5	28.0	
OPF20542-10A10	16	- 10	5/8"	5/8" - 14		12.5	97.5	10.2	26.0	63.0	28.0	
OPF20542-10A12	16	- 10	5/8"	3/4" - 14		15.0	98.0	9.0	27.0	64.0	32.0	
OPF20542-12A12	19	- 12	3/4"	3/4" - 14		15.0	107.0	9.0	28.5	70.5	32.0	
OPF20542-12A16	19	- 12	3/4"	1" - 11		19.8	109.0	10.5	30.0	72.5	38.0	
OPF20542-16A16	25	- 16	1"	1" - 11		19.8	139.5	10.5	36.5	91.0	38.0	

OPF20542: THRUST WIRE NUT / OPF20543: SLIP-ON NUT