



HYDRA-FLEX
HOSE AND FITTINGS
SOLUTIONS CENTER


OPF TYPE



BS STANDARD CONNECTIONS

OPF20592/OPF20593

90° BSP
FEMALE ELBOW 60° CONE
BS5200 / ISO 12151-6

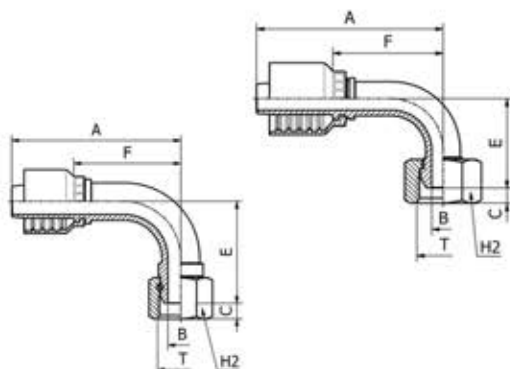

PART. REF.	HOSE BORE			Thread	DIMENSIONS mm						
	DN	Dash	inch	T		B	A	C	E	F	H2
OPF20592-03A02	5	- 3	3/16"	1/8" - 28		3.0	43.0	4.4	26.0	21.5	14.0
OPF20592-04A02	6	- 4	1/4"	1/8" - 28		3.1	56.0	4.4	27.0	28.5	14.0
OPF20593-04A04	6	- 4	1/4"	1/4" - 19		4.0	57.0	5.4	29.0	29.5	19.0
OPF20593-04A06	6	- 4	1/4"	3/8" - 19		7.0	57.0	6.0	31.0	29.5	22.0
OPF20593-05A06	8	- 5	5/16"	3/8" - 19		7.0	60.0	6.0	27.5	32.0	22.0
OPF20592-05A04	8	- 5	5/16"	1/4" - 19		4.0	54.5	4.1	29.5	26.5	19.0
OPF20593-06A08	10	- 6	3/8"	1/2" - 14		9.3	66.0	6.3	32.0	36.5	27.0
OPF20593-06A06	10	- 6	3/8"	3/8" - 19		7.0	66.0	6.0	31.5	36.5	22.0
OPF20592-08A06	12	- 8	1/2"	3/8" - 19		7.1	76.0	6.0	41.0	45.0	22.0
OPF20593-08A08	12	- 8	1/2"	1/2" - 14		9.3	76.0	6.3	36.5	45.0	27.0
OPF20592-08A10	12	- 8	1/2"	5/8" - 14		12.1	75.5	10.2	44.0	44.0	28.0
OPF20592-08A12	12	- 8	1/2"	3/4" - 14		15.0	75.5	9.0	45.5	44.0	32.0
OPF20592-10A10	16	- 10	5/8"	5/8" - 14		12.5	88.0	10.2	53.5	53.5	28.0
OPF20592-10A12	16	- 10	5/8"	3/4" - 14		15.0	88.0	9.0	55.0	53.5	32.0
OPF20592-12A12	19	- 12	3/4"	3/4" - 14		15.0	98.0	9.0	59.5	61.5	32.0
OPF20592-12A16	19	- 12	3/4"	1" - 11		19.8	98.0	10.5	62.0	61.5	38.0
OPF20592-16A16	25	- 16	1"	1" - 11		19.8	127.5	10.5	76.0	79.5	38.0

OPF20592: THRUST WIRE NUT / OPF20593: SLIP-ON NUT