





HYDRA-FLEX
HOSE AND FITTINGS
SOLUTIONS CENTER

OPF TYPE



BS STANDARD CONNECTIONS


OPF20812/OPF20813



BSP
O-RING FEMALE 60° CONE
BS5200 / ISO 12151-6

PART. REF.	HOSE BORE			Thread	DIMENSIONS mm						
	DN	Dash	inch	T		B	A	C	F	H2	
OPF20813-04A04	6	- 4	1/4"	1/4" - 19		4.0	44.5	5.4	17.0	19.0	
OPF20812-06A04	10	- 6	3/8"	1/4" - 19		4.1	47.5	4.1	18.0	19.0	
OPF20813-06A06	10	- 6	3/8"	3/8" - 19		7.0	49.0	6.0	19.5	22.0	
OPF20813-08A08	12	- 8	1/2"	1/2" - 14		9.3	51.5	6.3	20.5	27.0	
OPF20812-10A10	16	- 10	5/8"	5/8" - 14		12.5	56.5	9.7	22.0	28.0	
OPF20812-12A12	19	- 12	3/4"	3/4" - 14		15.0	61.5	8.5	25.0	32.0	
OPF20812-16A16	25	- 16	1"	1" - 11		19.8	75.5	10.6	27.5	38.0	
OPF20812-16A20	25	- 16	1"	1.1/4" - 11		26.1	79.0	10.5	31.0	50.0	

OPF20812: THRUST WIRE NUT / OPF20813: SLIP-ON NUT

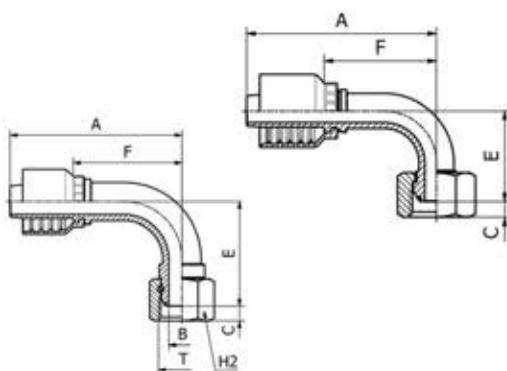

BS STANDARD CONNECTIONS

OPF20892/OPF20893

90° BSP
O-RING FEMALE SWEPT ELBOW 60° CONE
BS5200 / ISO 12151-6

PART. REF.	HOSE BORE			Thread	DIMENSIONS mm						
	DN	Dash	inch	T		B	A	C	E	F	H2
OPF20893-04A04	6	- 4	1/4"	1/4" - 19		4.0	57.0	5.4	29.0	29.5	19.0
OPF20892-06A04	10	- 6	3/8"	1/4" - 19		4.1	65.0	4.1	33.0	35.5	19.0
OPF20893-06A06	10	- 6	3/8"	3/8" - 19		7.0	66.0	6.0	31.5	36.5	22.0
OPF20893-08A08	12	- 8	1/2"	1/2" - 14		9.3	76.0	6.3	36.5	45.0	27.0
OPF20892-10A10	16	- 10	5/8"	5/8" - 14		12.5	87.5	9.7	55.0	53.0	28.0
OPF20892-12A12	19	- 12	3/4"	3/4" - 14		15.0	98.0	8.5	60.0	61.5	32.0
OPF20892-16A16	25	- 16	1"	1" - 11		19.8	127.5	10.6	76.0	79.5	38.0
OPF20892-16A20	25	- 16	1"	1.1/4" - 11		26.1	127.5	10.5	78.5	79.5	50.0

OPF20892: THRUST WIRE NUT / OPF20893: SLIP-ON NUT