



**HYDRA-FLEX**  
HOSE AND FITTINGS  
SOLUTIONS CENTER


## OPF TYPE



BS STANDARD CONNECTIONS

## OPF20842/OPF20843

**45° BSP  
O-RING FEMALE ELBOW 60° CONE  
BS5200 / ISO 12151-6**

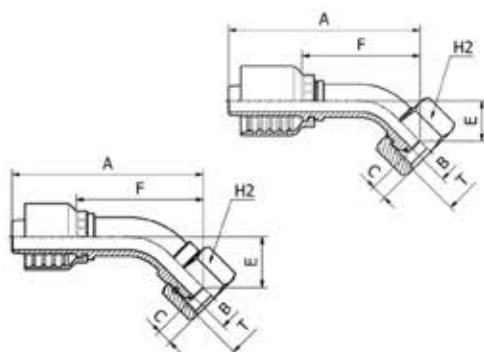


| PART. REF.     | HOSE BORE |      |      | Thread    | DIMENSIONS mm |      |       |      |      |      |      |  |
|----------------|-----------|------|------|-----------|---------------|------|-------|------|------|------|------|--|
|                | DN        | Dash | inch |           | T             | B    | A     | C    | E    | F    | H2   |  |
| OPF20843-04A04 | 6         | - 4  | 1/4" | 1/4" - 19 |               | 4.0  | 63.5  | 5.4  | 14.5 | 36.0 | 19.0 |  |
| OPF20843-06A06 | 10        | - 6  | 3/8" | 3/8" - 19 |               | 7.0  | 71.5  | 6.0  | 15.5 | 42.0 | 22.0 |  |
| OPF20843-08A08 | 12        | - 8  | 1/2" | 1/2" - 14 |               | 9.3  | 81.0  | 6.3  | 17.0 | 49.5 | 27.0 |  |
| OPF20842-10A10 | 16        | - 10 | 5/8" | 5/8" - 14 |               | 12.5 | 98.0  | 9.7  | 27.5 | 63.5 | 28.0 |  |
| OPF20842-12A12 | 19        | - 12 | 3/4" | 3/4" - 14 |               | 15.0 | 107.5 | 8.5  | 29.0 | 71.0 | 32.0 |  |
| OPF20842-16A16 | 25        | - 16 | 1"   | 1" - 11   |               | 19.8 | 138.5 | 10.6 | 35.5 | 90.5 | 38.0 |  |

OPF20842: THRUST WIRE NUT / OPF20843: SLIP-ON NUT

BS STANDARD CONNECTIONS

## OPF20882F

**90° BSP  
O-RING FEMALE COMPACT ELBOW 60° CONE  
BS5200 / ISO 12151-6  
(THRUST-WIRE NUT)**

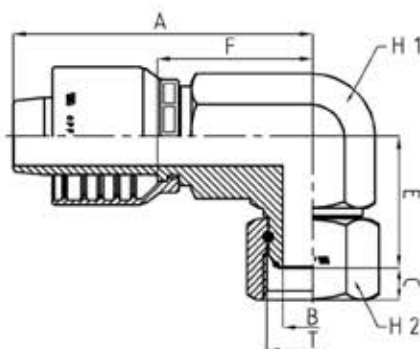

| PART. REF.      | HOSE BORE |      |      | Thread    | DIMENSIONS mm |      |       |      |      |      |      |      |
|-----------------|-----------|------|------|-----------|---------------|------|-------|------|------|------|------|------|
|                 | DN        | Dash | inch |           | T             | B    | A     | C    | E    | F    | H1   | H2   |
| OPF20882-04A04F | 6         | - 4  | 1/4" | 1/4" - 19 |               | 4.0  | 47.5  | 4.1  | 22.0 | 20.0 | 14.0 | 19.0 |
| OPF20882-06A06F | 10        | - 6  | 3/8" | 3/8" - 19 |               | 7.0  | 52.5  | 6.0  | 27.5 | 23.0 | 19.0 | 22.0 |
| OPF20882-08A08F | 12        | - 8  | 1/2" | 1/2" - 14 |               | 9.3  | 56.0  | 6.5  | 31.0 | 25.0 | 22.0 | 27.0 |
| OPF20882-10A10F | 16        | - 10 | 5/8" | 5/8" - 14 |               | 12.5 | 59.0  | 9.7  | 32.5 | 24.5 | 24.0 | 28.0 |
| OPF20882-12A12F | 19        | - 12 | 3/4" | 3/4" - 14 |               | 15.0 | 74.0  | 8.5  | 36.0 | 37.5 | 27.0 | 32.0 |
| OPF20882-16A16F | 25        | - 16 | 1"   | 1" - 11   |               | 20.0 | 100.0 | 10.6 | 44.0 | 52.0 | 36.0 | 38.0 |