



## 202L LIQUID FILLED BACK CONNECTED 1-1/2" DIAL WITH 1/8" NPT CONNECTION

Our '200' series gauge line is a high quality line of liquid filled gauges. The glycerin filling and built in snubber helps dampen the effects of pulsation and vibration, while also perpetually lubricating the movement (and keeping contaminants such as dirt away from all moving parts) which will extend the life of the gauge.


This gauge has been specifically designed with the original equipment manufacturers in mind and are typically used on hydraulic & pneumatic systems as well as any commercial or industrial application not corrosive to brass and bronze wetted parts where glycerin filling is suitable for use.

### SPECIFICATIONS:

- **Dial Size:** 1 1/2"
- **Connection Size:** 1/8"MNPT (includes built-in snubber)
- **Stainless Steel Case And Bezel**
- **Brass Internals & Connection**
- **Phosphor Bronze Bourdon Tube**
- **Plastic Lens Standard (Glass Available)**
- **Liquid Filled (Dry Available)**
- **Accuracy :** 1 1/2" Dial = 3-2-3 %
- **Dual Scale: PSI & Bar (x100=kPa)**  
Single Scale available from stock
- **Ambient temperature:** FILLED: 30°F to 160°F  
DRY: -30°F to 180°F




PART #	RANGE	CODE	Major In	Minor In
202L-158A	30/0"VAC	A	5	0.5
202L-158B	0/15	B	2	0.2
202L-158C	0/30	C	5	0.5
202L-158D	0/60	D	10	1
202L-158E	0/100	E	20	2
202L-158F	0/160	F	20	2
202L-158G	0/200	G	40	5
202L-158H	0/300	H	50	5
202L-158I	0/400	I	50	5
202L-158K	0/600	K	100	10
202L-158M	0/1000	M	200	20
202L-158N	0/1500	N	200	20
202L-158O	0/2000	O	400	50
202L-158P	0/3000	P	500	50
202L-158R	0/5000	R	1000	100
202L-158U	0/10,000	U	1000	100
202L-158V	0/15,000	V	2000	200

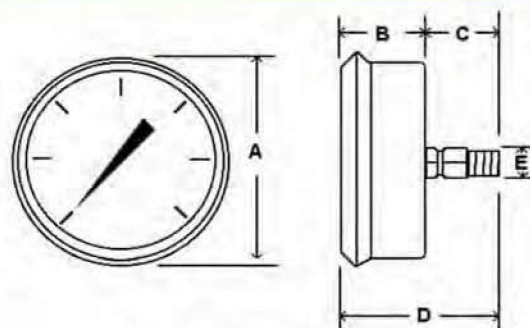

		A	B	C	D	E
1 1/2" Dial	In	1.88	1.06	.89	1.95	1/8" NPT
	MM	48	27	23	50	





## 202L LIQUID FILLED BACK CONNECTED 2" DIAL WITH 1/8" NPT CONNECTION

Our '200' series gauge line is a high quality line of liquid filled gauges. The glycerin filling and built in snubber helps dampen the effects of pulsation and vibration, while also perpetually lubricating the movement (and keeping contaminants such as dirt away from all moving parts) which will extend the life of the gauge.


This gauge has been specifically designed with the original equipment manufacturers in mind and are typically used on hydraulic & pneumatic systems as well as any commercial or industrial application not corrosive to brass and bronze wetted parts where glycerin filling is suitable for use.

### SPECIFICATIONS:

- Dial Size: 2"
- Connection Size: 1/8"MNPT (includes built-in snubber)
- Stainless Steel Case And Bezel
- Brass Internals & Connection
- Phosphor Bronze Bourdon Tube
- Plastic Lens Standard (Glass Available)
- Liquid Filled (Dry Available)
- Accuracy : 2" Dial Size= 3-2-3 %
- Dual Scale: PSI & Bar (x100=kPa)  
Single Scale available from stock
- Ambient temperature: FILLED: 30°F to 160°F  
DRY: -30°F to 180°F



PART #	RANGE	CODE	Major In	Minor In
202L-208A	30/0"VAC	A	5	0.5
202L-208B	0/15	B	2	0.2
202L-208C	0/30	C	5	0.5
202L-208D	0/60	D	10	1
202L-208E	0/100	E	20	2
202L-208F	0/160	F	20	2
202L-208G	0/200	G	40	5
202L-208H	0/300	H	50	5
202L-208I	0/400	I	50	5
202L-208K	0/600	K	100	10
202L-208M	0/1000	M	200	20
202L-208N	0/1500	N	200	20
202L-208O	0/2000	O	400	50
202L-208P	0/3000	P	500	50
202L-208R	0/5000	R	1000	100
202L-208U	0/10,000	U	1000	100
202L-208V	0/15,000	V	2000	200

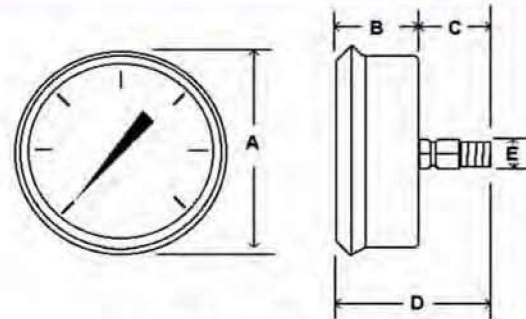

		A	B	C	D	E
2" Dial	In	2.23	1.09	.71	1.99	1/8"
	MM	57	28	23	51	NPT





## 202L LIQUID FILLED BACK CONNECTED 2-1/2" DIAL WITH 1/4" NPT CONNECTION

Our '200' series gauge line is a high quality line of liquid filled gauges. The glycerin filling and built in snubber helps dampen the effects of pulsation and vibration, while also perpetually lubricating the movement (and keeping contaminants such as dirt away from all moving parts) which will extend the life of the gauge.


This gauge has been specifically designed with the original equipment manufacturers in mind and are typically used on hydraulic & pneumatic systems as well as any commercial or industrial application not corrosive to brass and bronze wetted parts where glycerin filling is suitable for use.

### SPECIFICATIONS:

- **Dial Size:** 2 1/2"
- **Connection Size:** 1/4"MNPT (includes built-in snubber)
- **Stainless Steel Case And Bezel**
- **Brass Internals & Connection**
- **Phosphor Bronze Bourdon Tube**
- **Plastic Lens Standard (Glass Available)**
- **Liquid Filled (Dry Available)**
- **Accuracy :** 2 1/2" Dial Size = 1.5 %
- **Dual Scale: PSI & Bar (x100=kPa)**  
Single Scale available from stock
- **Ambient temperature:** FILLED: 30°F to 160°F  
DRY: -30°F to 180°F



PART #	RANGE	CODE	Major In	Minor In
202L-254A	30/0"VAC	A	5	0.5
202L-254B	0/15	B	2	0.2
202L-254C	0/30	C	5	0.5
202L-254D	0/60	D	10	1
202L-254E	0/100	E	20	2
202L-254F	0/160	F	20	2
202L-254G	0/200	G	40	5
202L-254H	0/300	H	50	5
202L-254I	0/400	I	50	5
202L-254K	0/600	K	100	10
202L-254M	0/1000	M	200	20
202L-254N	0/1500	N	200	20
202L-254O	0/2000	O	400	50
202L-254P	0/3000	P	500	50
202L-254R	0/5000	R	1000	100
202L-254U	0/10,000	U	1000	100
202L-254V	0/15,000	V	2000	200

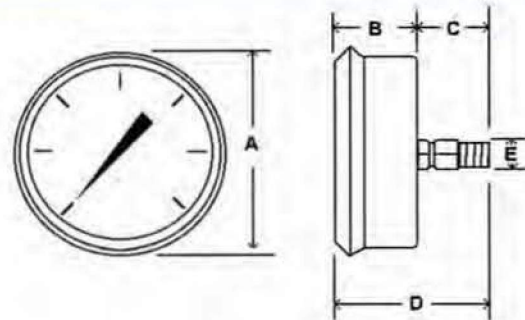

		A	B	C	D	E
2 1/2" Dial	In	2.80	1.28	1.18	2.46	1/4" NPT
	MM	71	33	30	63	