



HYDRA-FLEX
HOSE AND FITTINGS
SOLUTIONS CENTER


MULTIFIT TYPE



SAE STANDARD CONNECTIONS

M24791KR

90° JIC FEMALE LONG DROP ELBOW
37° CONE SEAT
SAE J516 / ISO 12151-5




PART. REF.	HOSE BORE			Thread	DIMENSIONS mm						
	DN	Dash	inch	T		B	A	C	E	H2	
M24791-04-04KR	6	- 4	1/4"	7/16" - 20		4.2	28.5	8.9	45.0	15.0	
M24791-06-06KR	10	- 6	3/8"	9/16" - 18		7.0	35.5	9.5	55.0	17.0	
M24791-08-08KR	12	- 8	1/2"	3/4" - 16		9.3	44.0	10.7	64.0	22.0	
M24791-10-10KR	16	- 10	5/8"	7/8" - 14		12.5	53.5	12.5	70.0	25.0	
M24791-12-12KR	19	- 12	3/4"	1.1/16" - 12		15.0	62.0	14.1	96.0	32.0	

SAE STANDARD CONNECTIONS

M22541KR

45° JIC FEMALE SWEPT ELBOW
37° CONE SEAT
SAE J516 / ISO 12151-5

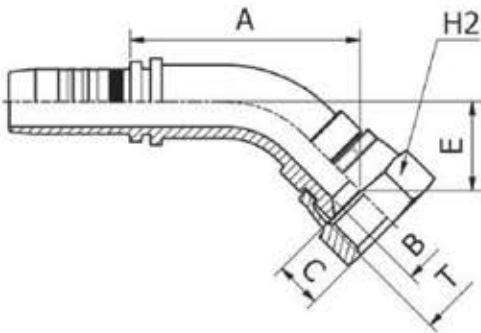

PART. REF.	HOSE BORE			Thread	DIMENSIONS mm						
	DN	Dash	inch	T		B	A	C	E	H2	
M22541-04-04KR	6	- 4	1/4"	7/16" - 20		4.2	34.5	8.9	13.5	15.0	
M22541-04-05KR	6	- 4	1/4"	1/2" - 20		4.0	35.0	9.4	14.0	17.0	
M22541-06-06KR	10	- 6	3/8"	9/16" - 18		7.0	42.0	9.5	16.0	17.0	
M22541-08-08KR	12	- 8	1/2"	3/4" - 16		9.3	52.0	10.7	20.0	22.0	
M22541-10-10KR	16	- 10	5/8"	7/8" - 14		12.5	61.0	12.5	22.5	25.0	
M22541-12-12KR	19	- 12	3/4"	1.1/16" - 12		15.0	69.0	14.1	26.5	32.0	